



PRV754KLED

75" 4K Ultra High Resolution Commercial Grade LED – LCD Monitor

Slim & Reliable- This 24/7 rated display features true 4K 3840 x 2160 resolution providing a strikingly clear image.

Direct LED – This new display features direct LED backlighting for a more uniform looking monitor with lower power consumption.

Applications – High Tech Conference Room, Digital Signage, Control Rooms, Broadcast, Gaming and Hospitality, Retail, Higher Education, Corporate, Healthcare and Industrial.


Highlights

- 75" true 4K industrial display with *metal frame housing*
- New Direct LED 500 NITS backlight
- Internal upscale capability from FHD to UHD
- Wired for ultra 4K HD resolution with HDMI and Display Port
- Super thin ADA compliant depth
- Optional Multi-Touch Technology
- Heat Control – sensors monitor internal temperature allowing remote control of fans
- Industrial reliability (50,000 hours)

Technical Specification

Display	Screen Size	75"
	Aspect Ratio	16:9
	Resolution	3840 x 2160 (QWUXGA)
	Refresh Rate	120Hz
	Response Time (ms)	6ms
	Brightness	500 cd/m2
	Contrast Ratio	1200:1
	Viewing Angle	178° / 178°
	Colors	1.07 Billion (10 BIT)
Connectivity	USB	Software Updates
	RS-232-IN	1 x Input
	HMDI	1 x Input
	DVI-D	1 x Input
	RJ45	Serial over IP Control
	SPEAKERS	L/R Connectors
	AC Power	1 x Input
Power	Requirements	AC 90~240V @ 50/60Hz
	Standby Consumption	3W
	Operating Consumption	220W
Environmental	Operating Temperature	0° - 50° C
	Operating Humidity	10% - 90%
General	Dimensions	67 ³ / ₃₂ " X 38 " X 3 ¹ / ₄ "
		1704mm X 990mm X 82.1mm
	Weight	64.2 Kg
		141 Lb
VESA Dimensions	800X400mm & 800X600mm	

Mechanical Drawing

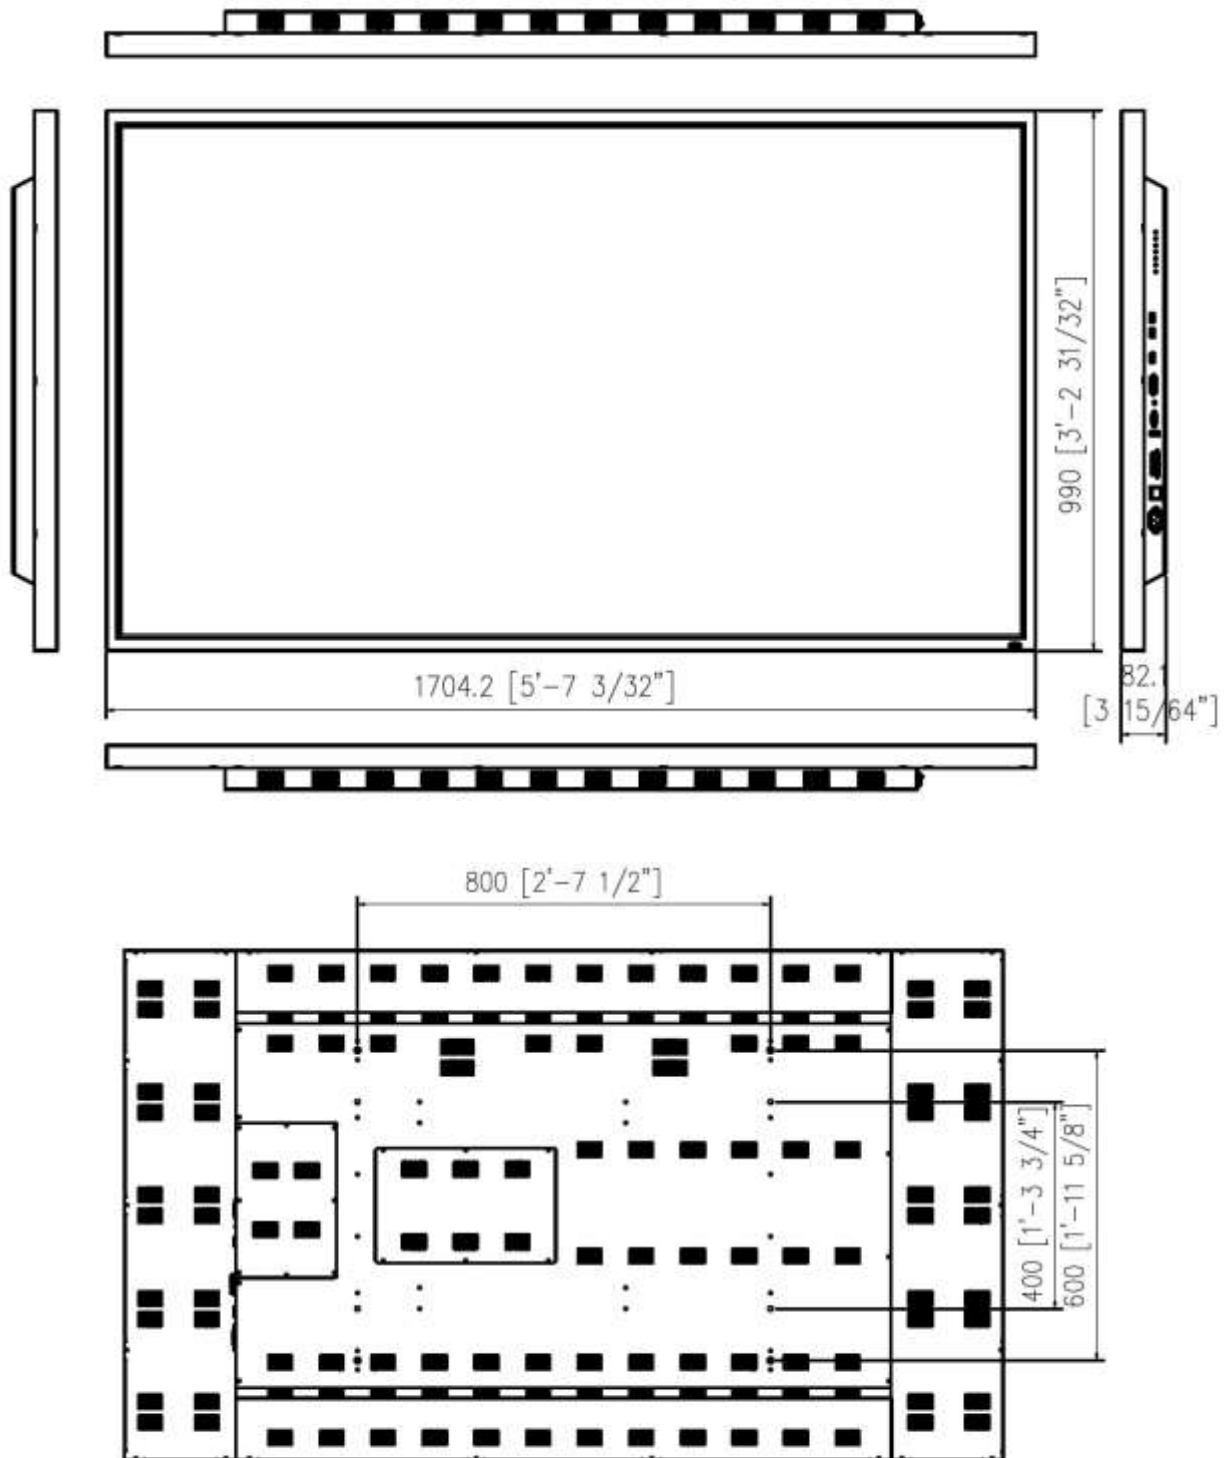

VESA HOLE : 800 x 600, 800 x 400 mm